



FRW-6NX-3, ~4(A)



FRW-8NX-2, ~2(A)




FRW-10N-2



FRW-13N-3, ~4

头部尺寸

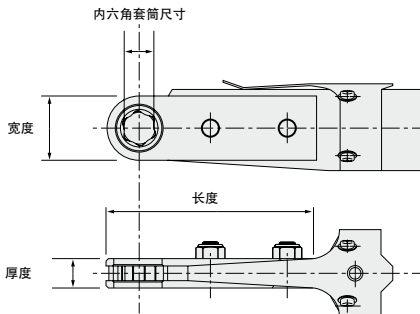

套筒尺寸

型号	内六角套筒尺寸(mm)	
	标准	其他尺寸
FRW-6NX-3	10	8 · 8W · 10W
FRW-6NX-3A	10	8
FRW-6NX-4	13	12 · 12W · 13W
FRW-6NX-4A	13	12
FRW-8NX-2	14	10 · 12 · 13 · 1/2" · 9/16" · 10W · 12W · 13W · 14W
FRW-8NX-2A	14	10 · 12 · 13
FRW-10N-2	17	13 · 14 · 16 · 9/16" · 5/8" · 14W · 17W
FRW-13N-3	21	18 · 19 · 19W · 21W
FRW-13N-4	24	22 · 26 · 27 · 22W · 24W · 26W · 27W

\*在订购工具时指定套筒尺寸。.

型号	螺栓尺寸		推荐的扭矩范围		空载速度 min <sup>-1</sup>	内六角套筒尺寸 mm	头部尺寸						总长度		重量		耗气量(负载)		空气软管尺寸	
	mm	N.m	kgf.m	ft.lb			厚度		宽度		长度		mm	in	kg	lb	m <sup>3</sup> /min	ft <sup>3</sup> /min	mm	in
							mm	in	mm	in	mm	in								
FRW-6NX-3	M6	10.8	1.1	8.1	200	10	13	33/64	20	25/32	88	315/32	316	127/16	1.2	2.6	0.25	8.8	9.5	3/8
FRW-6NX-3A	M6	10.8	1.1	8.1	200	10	10	25/64	20	25/32	88	315/32	316	127/16	1.2	2.6	0.25	8.8	9.5	3/8
FRW-6NX-4	M6	12.7	1.3	9.4	170	13	13	33/64	24	61/64	93	321/32	320	129/16	1.2	2.6	0.25	8.8	9.5	3/8
FRW-6NX-4A	M6	12.7	1.3	9.4	170	13	10	25/64	24	61/64	93	321/32	320	129/16	1.2	2.6	0.25	8.8	9.5	3/8
FRW-8NX-2	M8	29.4	3.0	22.1	200	14	18	45/64	25	63/64	108	4 1/4	378	1457/64	2.2	4.9	0.43	15.2	9.5	3/8
FRW-8NX-2A	M8	29.4	3.0	22.1	200	14	10	25/64	25	63/64	108	4 1/4	378	1457/64	2.1	4.6	0.43	15.2	9.5	3/8
FRW-10N-2	M10	44.1	4.5	33.1	140	17	18	45/64	33	119/64	115	417/32	417	1613/32	2.7	6.0	0.58	20.5	9.5	3/8
FRW-13N-3	M12	58.8	6.0	44.1	130	21	18	45/64	36	127/64	116	49/16	419	161/2	2.7	6.0	0.58	20.5	9.5	3/8
FRW-13N-4	M12	78.4	8.0	58.8	100	24	18	45/64	46	113/64	129	45/64	431	1631/32	3.0	6.6	0.58	20.5	9.5	3/8

进气口螺纹尺寸: PT 或 NPT 1/4".

NX 机型配有消音器.