


重型角向气钻 可反转



F-22RCR.S

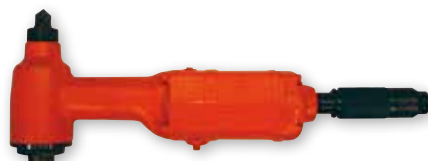

F-32RCR.S



FCD-23R~50R.S



FCD-75R, 100R.S

型号		钻孔能力				失速扭矩			空载转速	套筒	侧到中心		进给长度		功率		总长度		重量		最大耗气量		空气软管尺寸	
		钻孔		绞孔 攻丝							mm	in	mm	in	mm	in	W	hp	mm	in	kg	lb	m ³ /min	ft ³ /min
普通手柄手柄	自回复型	mm	in	mm	in	N.m	kgf.m	ft.lb	min ⁻¹	M.T.#	mm	in	mm	in	W	hp	mm	in	kg	lb	m ³ /min	ft ³ /min	mm	in
F-22RCR	F-22RCR-1S	22	7/8	19.0	3/4	93.2	9.5	68.7	400	2	35	1 3/8	60	2 3/8	900	1.21	505	19 7/8	8.5	18.7	1.50	53.0	12.7	1/2
F-32RCR	F-32RCR-1S	32	1 1/4	25.0	1	113.0	11.5	83.1	315	3	40	1 37/64	60	2 3/8	810	1.09	538	21 3/16	10.0	22.0	1.50	53.0	12.7	1/2
FCD-23R-11	FCD-23R-11S	22	7/8	19.0	3/4	80.4	8.2	59.3	430	2	27	1 1/16	35	1 3/8	900	1.21	472	18 37/64	7.0	15.4	1.50	53.0	12.7	1/2
FCD-23R-12	FCD-23R-12S	22	7/8	19.0	3/4	80.4	8.2	59.3	430	3	27	1 1/16	35	1 3/8	900	1.21	472	18 37/64	7.1	15.6	1.50	53.0	12.7	1/2
FCD-32R-11	FCD-32R-11S	32	1 1/4	32.0	1 1/4	177.0	18.0	130.1	350	3	35	1 3/8	53	22 3/4	1600	2.15	578	22 3/4	13.5	29.7	1.80	63.5	12.7	1/2
FCD-50R-11	FCD-50R-11S	50	2	50.0	2	392.0	40.0	289.0	140	4	41	1 5/8	58	2 5/16	1600	2.15	595	23 27/64	16.0	35.2	2.25	79.4	19	3/4
FCD-75R-11	FCD-75R-11S	75	3	75.0	3	834.0	85.0	614.8	85	5	49	1 15/16	57	2 1/4	1900	2.55	651	25 5/8	20.5	45.1	2.50	88.3	19	3/4
FCD-100R-11	FCD-100R-11S	100	4	100.0	4	1370.0	140.0	1012.6	40	5	62	2 7/16	105	4 1/8	1900	2.55	730	28 3/4	29.3	64.4	2.25	79.4	19	3/4

进气口螺纹尺寸: PT or NPT 1/2".

"S" 是自回复型开关, 适用于CE和ANSI/NA市场